


LE series



| Operational limits - Standard components - DIN 24960 | |
|--|------------|
| P | 4 bar |
| V | 12 m/s |
| T | -35 +120°C |


| | | |
|-------------------|---|---|
| Counterface | V | - |
| Elastomeric parts | P | V |

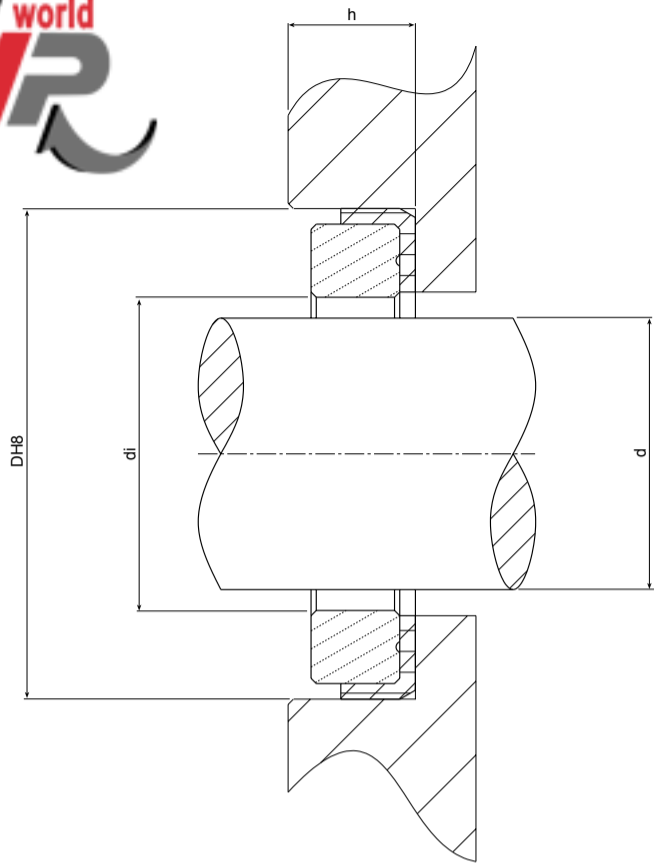

M - MTU code: initial installation - A - Alternative code: initial installation

| Type | Description | d | di | DH8 | H | M | A |
|------|-------------|----|------|-------------|----------|---------|---------|
| LE-2 | 16,5 30 | 16 | 16,5 | 30÷30,033 | 13,5±0,2 | 4752545 | 4706879 |
| LE-3 | 20,5 33,3 | 18 | 20,5 | 33,3÷33,8 | 5,5±0,2 | - | 311488 |
| LE-4 | 21 40 | 20 | 21 | 40÷40,039 | 13,5±0,5 | 4757007 | 4710555 |
| LE-5 | 26 45 | 25 | 26 | 45÷45,033 | 10±0,2 | - | - |
| LE-6 | 27 50 | 25 | 27 | 50÷50,039 | 10±0,2 | - | - |
| LE | 17,5 29 | 16 | 17,5 | 29,2÷29,252 | 5±0,2 | - | - |

LI series

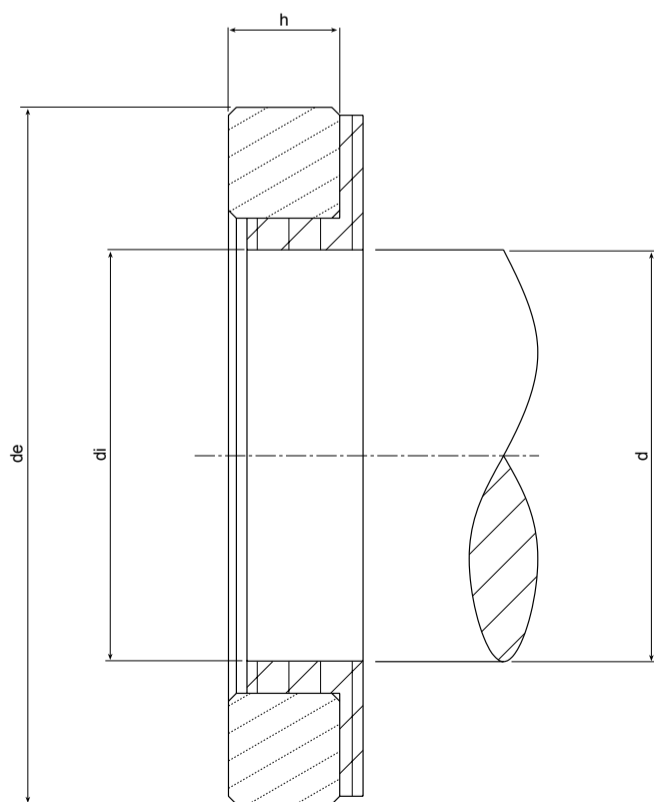

| Operational limits - Standard components - DIN 24960 | |
|--|------------|
| P | 4 bar |
| V | 12 m/s |
| T | -35 +200°C |

| | | |
|-------------------|---|----|
| Counterface | V | Q |
| Elastomeric parts | P | P4 |



| Type | Description | d | di | de | h |
|------|-------------|---|--------------|------|--------|
| LI-1 | 15 29,5 | 5 | 14,987÷15,00 | 29,5 | 5±0,2 |
| LI-2 | 16 29,5 | 5 | 15,90÷16,00 | 29,5 | 5±0,2 |
| LI-3 | 21 35 | 5 | 20,97÷21,00 | 35 | 5±0,15 |