

RELY ON EXCELLENCE

NF94

Mechanical seals | Compressor seals | Gas-lubricated seals

**Features**

- Single seal with double seal function
- Non-contacting from static to high speed condition
- Balanced
- Bi-directional
- Stationary multiple springs

Advantages

- Wear-free and contact-free operation
- Prevents the ingress of foreign particles

Operating rangePressure: $p = 5 \text{ bar (73 PSI)}$

Temperature:

 $t = -20 \text{ °C ... } +200 \text{ °C (-4 °F ... } +392 \text{ °F)}$ Sliding velocity: $vg = 60 \text{ m/s (197 ft/s)}$ **Materials**

Seal face: High-density carbon graphite

Seat: Ductile stainless steel with TiN-coating or silicon carbide

Secondary seals: FKM

Metal parts: CrNiMo steel

Notes


Seals from the NF941 series are used in screw compressors for special applications. They are hybrid seals that seal both aerostatically and aerodynamically. The separation gas is routed through holes in the stationary seal ring directly between the seal faces, while the lift-off is caused by specially designed gas grooves. API 692 compliant.

Dimensions on request.

Recommended applications

- Process industry
- Single wafer cleaning systems
- Dry screw compressors
- Blowers
- Agitators

RELY ON EXCELLENCE

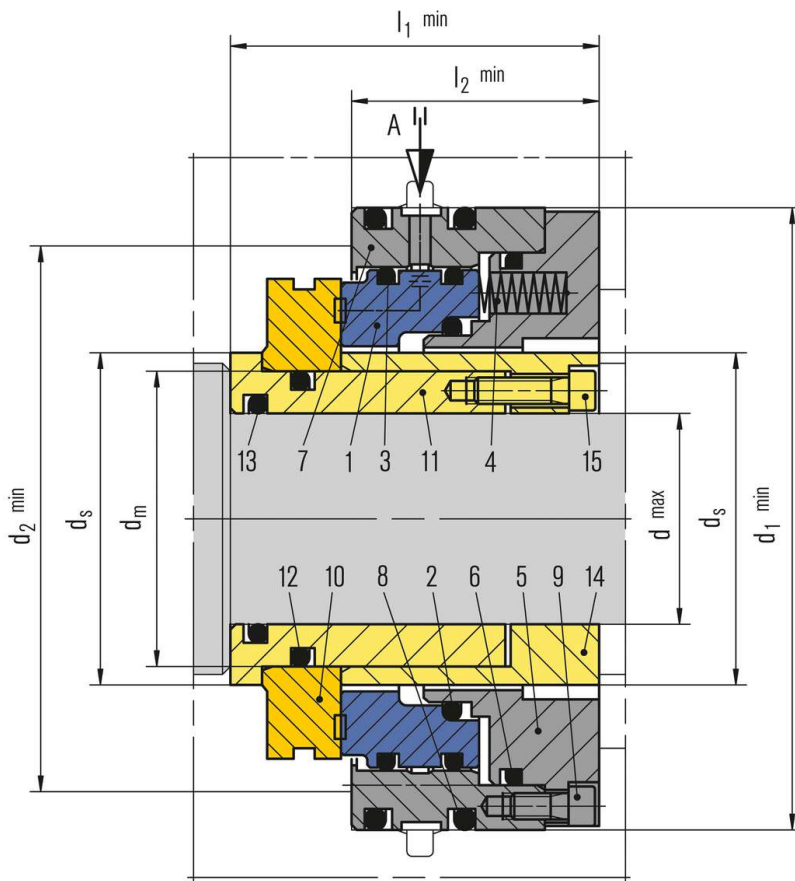

Item	Description
1	Seal face
2, 3, 6, 8, 12, 13	O-Ring
4	Spring
5	Adapter
7	Housing
9, 15	HSH cap screw
10	Seat
11	Shaft sleeve
14	Clamp sleeve
A	Seal gas supply