
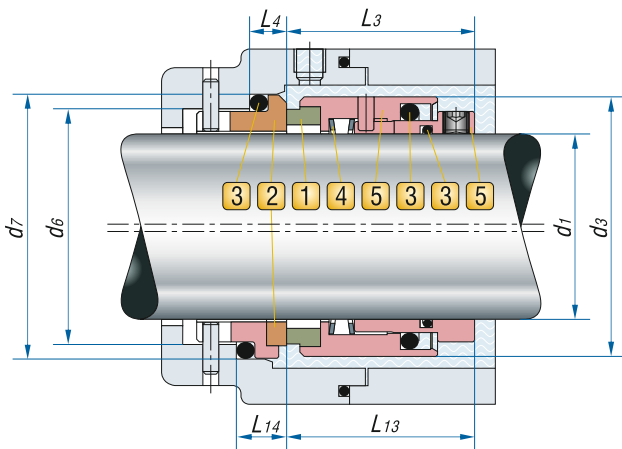


R-HJ92N

Equivalent to Burgmann HJ92N/HJ977GN

Temperature: **-20°C~200°C**
 Pressure: **≤2.5 MPa**
 Velocity: **≤25 m/s**


Температура: **-20°C~200°C**
 Давление: **≤2.5 МПа**
 Скорость: **≤25 м/сек**

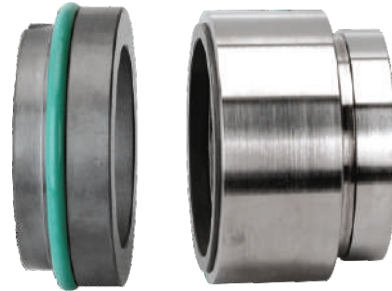

R-HJ92N


	d ₁ (h6)	d ₃ (Max)	d ₆	d ₇ (H8)	L ₃ (±0.5)	L ₄	L ₁₃ (±0.5)	L ₁₄
R-HJ92N-18	18	32	27	33	30.5	7.0	28.5	9.0
R-HJ92N-20	20	34	29	35	30.5	7.0	28.5	9.0
R-HJ92N-22	22	36	31	37	30.5	7.0	28.5	9.0
R-HJ92N-24	24	38	33	39	33.0	7.0	31.0	9.0
R-HJ92N-25	25	39	34	40	33.0	7.0	31.0	9.0
R-HJ92N-28	28	42	37	43	35.5	7.0	33.0	9.5
R-HJ92N-30	30	44	39	45	35.5	7.0	33.0	9.5
R-HJ92N-32	32	47	42	48	35.5	7.0	33.0	9.5
R-HJ92N-33	33	47	42	48	35.5	7.0	33.0	9.5
R-HJ92N-35	35	49	44	50	35.5	7.0	33.0	9.5
R-HJ92N-38	38	54	49	56	37.0	8.0	34.5	10.5
R-HJ92N-40	40	56	51	58	37.0	8.0	34.5	10.5
R-HJ92N-43	43	59	54	61	37.0	8.0	34.5	10.5
R-HJ92N-45	45	61	56	63	37.0	8.0	34.5	10.5
R-HJ92N-48	48	64	59	66	37.0	8.0	34.5	10.5
R-HJ92N-50	50	66	62	70	38.0	9.5	35.5	12.0
R-HJ92N-53	53	69	65	73	38.0	9.5	35.5	12.0
R-HJ92N-55	55	71	67	75	38.0	9.5	35.5	12.0
R-HJ92N-58	58	78	70	78	42.0	10.5	39.5	13.0
R-HJ92N-60	60	80	72	80	42.0	10.5	39.5	13.0
R-HJ92N-63	63	83	75	83	42.0	10.5	39.5	13.0
R-HJ92N-65	65	85	77	85	42.0	10.5	39.5	13.0
R-HJ92N-68	68	88	81	90	41.5	11.0	39.0	13.5
R-HJ92N-70	70	90	83	92	48.5	11.5	46.0	14.0
R-HJ92N-75	75	99	88	97	48.5	11.5	46.0	14.0
R-HJ92N-80	80	104	95	105	48.5	11.5	46.0	14.0
R-HJ92N-85	85	109	100	110	48.5	11.5	46.0	14.0
R-HJ92N-90	90	114	105	115	52.0	13.0	49.5	15.5
R-HJ92N-95	95	119	110	120	52.0	13.0	49.5	15.5
R-HJ92N-100	100	124	115	125	52.0	13.0	49.5	15.5

1 Вращающееся кольцо




Carbon/SiC

2 Неподвижное кольцо



R-G16

SiC



R-G46

SiC/TC

3 Сильфон

- Ethylene-Propylene: EPDM
- Fluorocarbon: VITON
- Nitrile: NBR

4 Пружина

SUS304 / SUS316.

5 Металлические части

SUS304 / SUS316.