

HBrinker Mechanical Seal

Engineered seals

Mechanical Seal HBDSA



H-Brinker

www.HBrinker.com



Mechanical Seal HBDFP

Operating range

Shaft diameter: $d_1 = 120 \dots 250 \text{ mm}$ (4.72" ... 9.84")

Pressure: $p_1 = 70 \text{ bar}$ (1,015 PSI)

Temperature: $t = 300 \text{ }^\circ\text{C}$ (572 °F)

Sliding velocity: $v_g = 70 \text{ m/s}$ (330 ft/s)

Axial movement: $\pm 3 \text{ mm}$



Materials

- Seal face: Composite carbon
- Seat: SiC DiamondFace coated
- Secondary seals: EPDM (E), FFKM (K)
- Springs: CrNiMo steel (G)
- Metal parts: CrNiMo steel (G)

Features

- Cartridge design
- Single seal
- Balanced
- Integrated pumping device
- Stationary spring loaded unit
- Inserted seal ring
- Rotating mating ring (DiamondFace coated)

Advantages

- Resistant to electrochemical corrosion.
- Extremely long service life (>40,000 h).
- No dosing system, no cooling circuit conditioning required.
- Diamond coating provides very low friction, thus reduced power consumption.
- Deformation-optimized for high sliding velocities and medium pressures.
- Economical due to standardized components.
- High flexibility due to adaptation of the connection parts to the pump seal chamber.
- Optimum heat dissipation due to integrated pumping device and optimized seat / seal face design.

Recommended applications

- Power plant technology
- Boiler feed pumps

Telegram: +3197010281216

WhatsApp: +3197010281216

Email: Info@Hbrinker.com

HBrinker Mechanical Seal


Engineered seals

Mechanical Seal HBDFA



H-Brinker

www.HBrinker.com

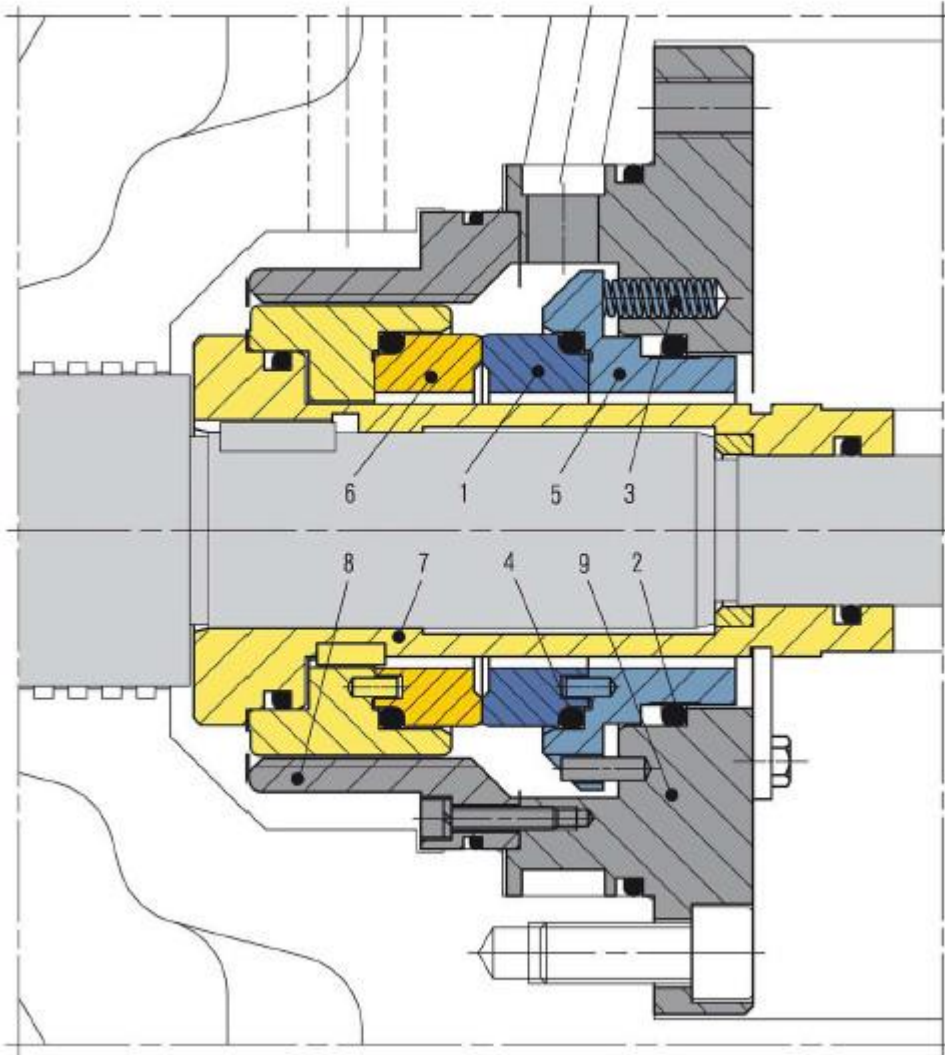

Item	Description
1	Seal ring
2	O-Ring
3	Spring
4	O-Ring
5	Seat collar
6	Mating ring (DiamondFace coated)
7	Shaft sleeve
8	Pumping sleeve
9	Cover