


13~16mm



20~50mm

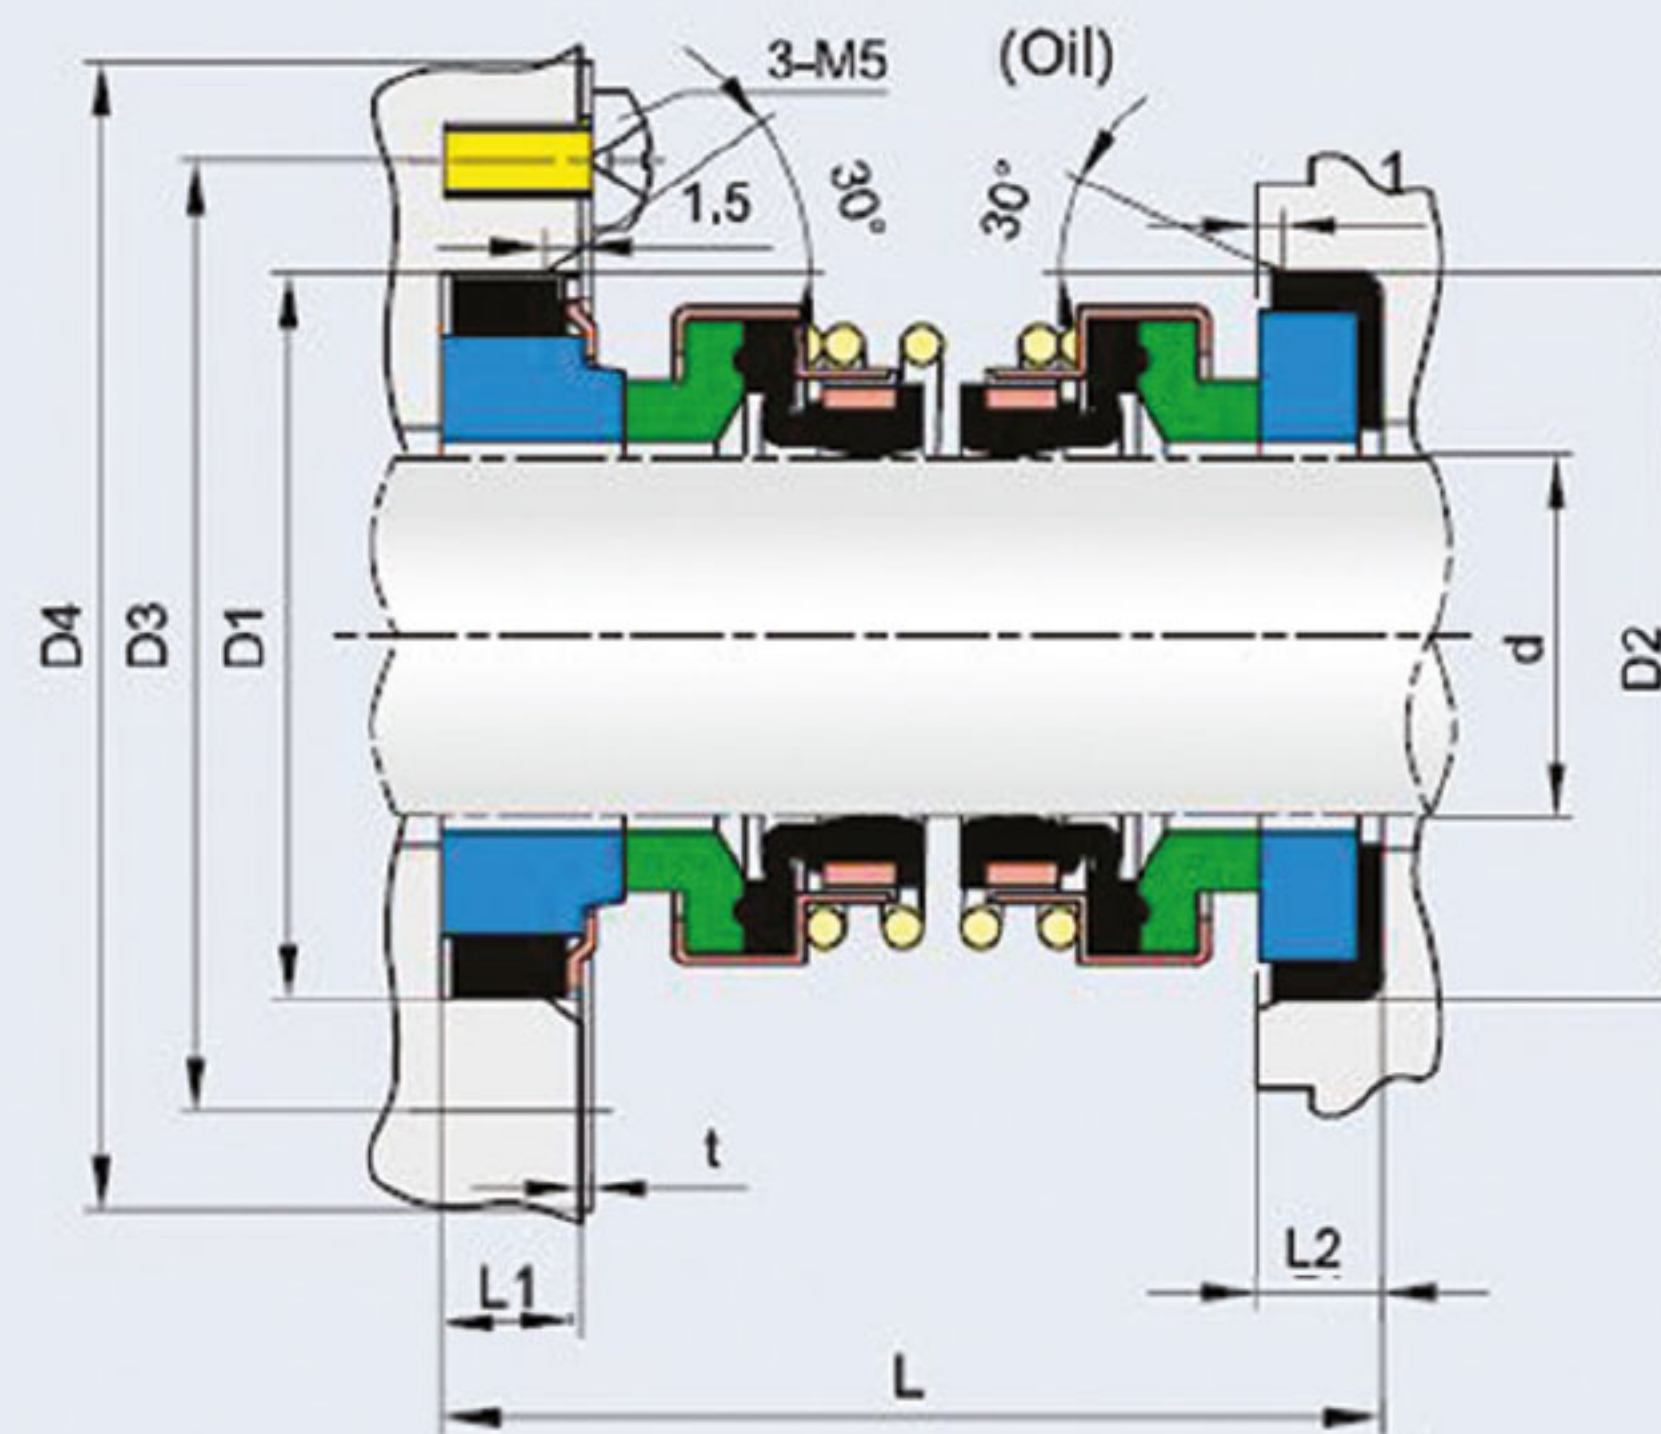

- (Operating Conditions)
 (Temperature) : <math><80^{\circ}\text{C}</math>
 (Pressure) : <math><0.5\text{MPa}</math>
 (Speed) : <math><10\text{m/s}</math>

- (Materials)
 (Stationary Ring): Q1,Q2,U2
 (Atmosphere side Rotary Ring): B
 (Rotary Ring): Q1,Q2,U2
 (Atmosphere side Rotary Ring): B
 (Secondary Seal): P
 (Spring and Metal Parts):F

- Applications : Clean water, sewage water, oil and other weakly Corrosive fluids.



Size (Metric)	d	D1	D2	D3	D4	L	L1	L2	t
13	13	25	25	—	—	36	5	—	—
14	14	30	30	—	—	36	5	—	—
15	15	30	30	—	—	36	5	—	—
16	16	30	30	—	—	36	5	—	—
20	20	44	38	60	72	49	7	7	1
25	25	50	44	60	72	51	7	7	1
30	30	57	54/44	70	82	59	9	8	1
35	35	64/57	58/54	80	94	61	9	9	1.2
40	40	70	64/68	85	100	64.5	11	9	1.2
45	45	70	66/68	90	105	65	10	9	1.2
50	50	80	72	95	109	69.5	10	9	1.2