

# HBrinker Mechanical Seal

Grundfos seals Mechanical Seal HB706K



## Mechanical Seal HB706K

### Operating range

- Temperature: -40 to +200 c
- Pressure: <=1.6 mpa
- Speed: <=15 m/s
- Stationary and rotating face: SIC/SIC – Viton
- Material of metal part:AISI304
- Available Material: CARBON/SIC/TC/EPDM/VITON, SS304 or SS316
- Rubber type: EPDM
- Shaft diameter:22-32
- Width of transport packing: 8cm
- Length of transport packing: 8cm
- Height of transport packing: 10cm

The material can be changed based on the type of order



### Seal HB706K

- Rotary Face: Silicon carbide
- Stationary Seat: Silicon carbide
- Auxiliary Seal
  - Ethylene-Propylene-Diene EPDM
  - Fluorocarbon-Rubber (Viton)
- Spring
  - Stainless Steel (304)
  - Stainless Steel (316)
- Metal Parts
  - Stainless Steel (304)
  - Stainless Steel (316)

### Grundfos pump type


Cartridge seal HB706K series to pumps Grundfos SE / SL (SEV, SLV). It used in waste and untreated waters for sophisticated utilities and industrial environments

# HBrinker Mechanical Seal

Grundfos seals      Mechanical Seal HB706K



## Dimension

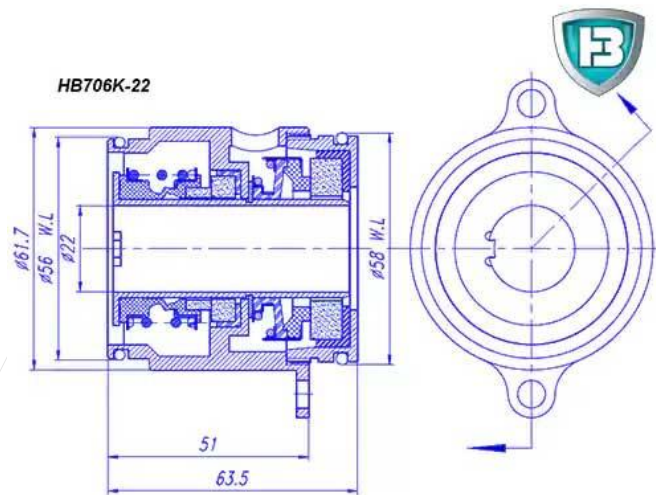

V

